


How to order

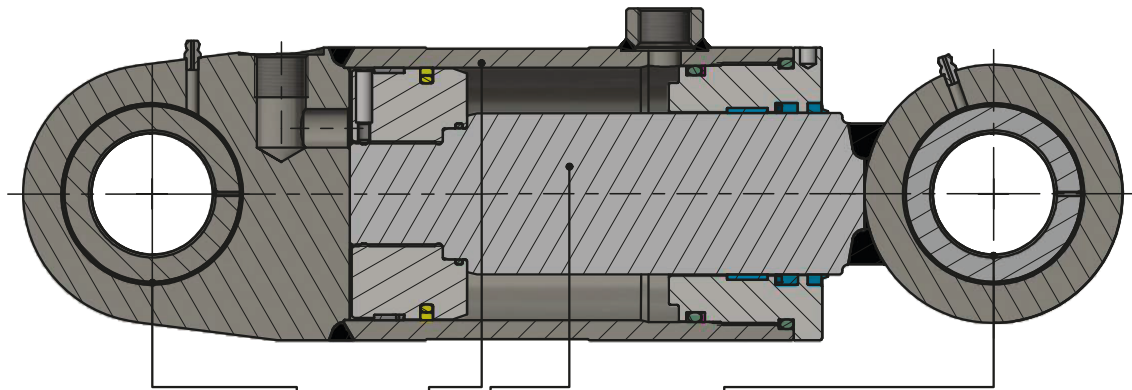

F2 - X - X - D / d x Stroke - X - X - X - (X)

Type

Rearmounting

Function E - D
E = Single-acting
D = Double-acting

Cylindertubediameter

Pistonrodmounting

Sealing type

Pistonroddiameter

SP - Special
Not stand. mess. from katalog

Pistonrodmaterial **R** = (Stainless steel)

Rearmounting:

S	Spherical bearing
C	Spherical composite bearing
V	Trunnion mount
FFL	Front Flange

Pistonrodmounting:

S	Spherical bearing
C	Spherical composite bearing
AC	Spherical composite bearing adjustable
GV	Thread

Sealing type

1	Standard, Polyurethan/Nitril
2	Low friction, PTFE (Bronze) / Nitril
3	High temp. PTFE (Bronze) / Viton
4	PTFE (carbon) / Viton
5	Special material qualities can be delivered on request

Quality Control

Advanced test equipment

